


95%QE BSI High sensitivity camera

INDIGO
IMAGING




Applications

Life science Vehicle monitoring
Field shooting Machine vision

Advantages

2" Back-thinned CMOS
QE up to 95%@580nm
Low readout noise: 1.3e-
2048 x 2048 Resolution
High dynamic range up to 93dB
Multi trigger mode design
USB3.0 transport interface

Quantum Efficiency

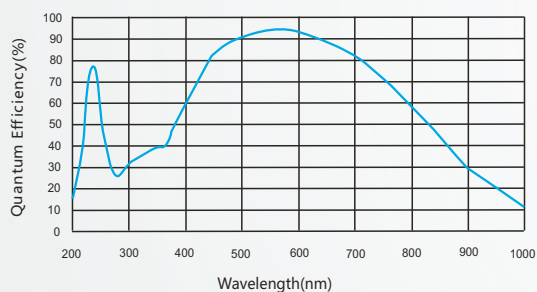

Specification

Product model	S-95-M-R-U
Sensor type	BSI CMOS
Resolution	2048x2048
Sensor size	2"
Color	Monochrome
Shutter type	Rolling Shutter
Pixel size	11μm x 11μm
Quantum efficiency	95%@580nm
Readout noise	1.3e-
Full well capacity	100ke-
Dynamic range	93dB
Frame rate	24fps
Bit depth	8bit / 16bit
Analog gain	High/Low Gain
Exposure model	Auto, Manual, Trigger
Exposure time	0.02ms~10s
Image processing	Image Enhancement, Noise Reduction, Contrast, ROI, Noise Reduction, mirror reversal, external trigger, gain, etc.
External trigger mode	Standard/synchronous/global/software trigger
Signal output	Exposure/readout/global
Optical interface	M42x0.75/C interface
Data interface	USB3.0
Power interface	USB3.0
Trigger interface	Hirose, HR10A-7R-6PB
Power supply	5V
Power consumption	<3 W
Size	351g, 60mm x 60mm x 64.5mm
Operating temperature	0°C~50°C
Storage temperature	0°C~70°C



Indigo-Imaging Technology Co.,Ltd. www.indigo-imaging.com

Tel: 0086-591-8358 8265-812

Email: support@indigo-imaging.com

Address: BLD 5#, Intelligent Industry Park, 2#, YangQiZhi Road, Gaishan Town, CangShan District, FuZhou, CHINA